

FLEXIBLE FLOOR AND FLOORING PALLET

A UNIQUE STORING
CONCEPT FOR
FLEXIBLE FLOOR.






Rack Flooring pallet show 2 level on wheel base. You can add one rack more on top for 4 levels (4 levels not with wheel base)




Rack Flooring pallet assembled on wheel base




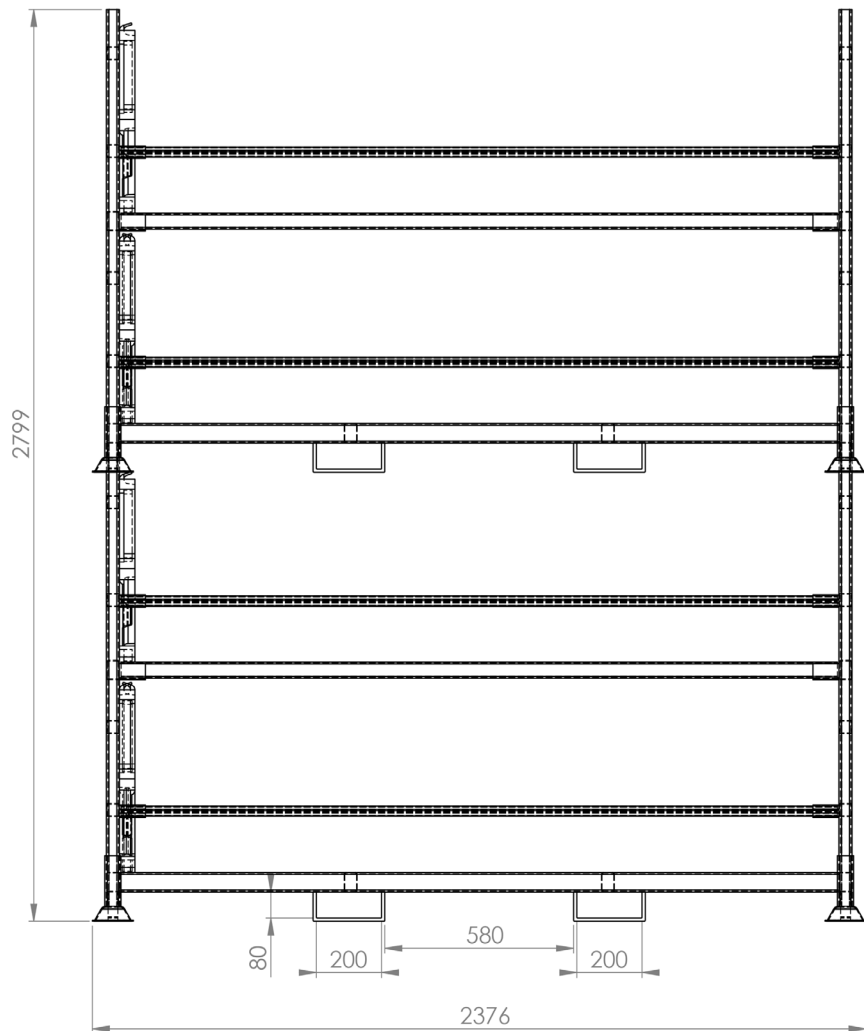


- Number in one row: 45 pcs
- Number in one level: 90 pcs

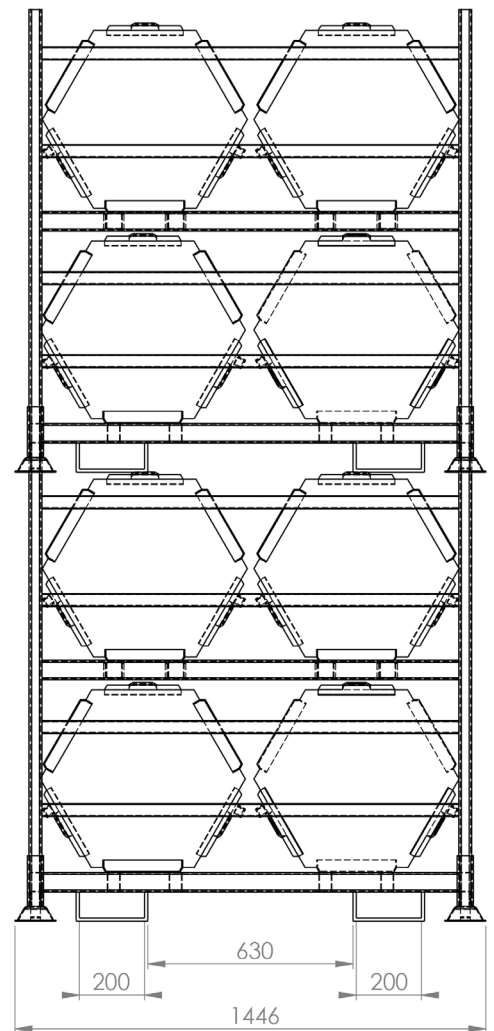

- Number in 4 levels: 360 pcs
- Number of sqm 3 levels: 97,2 sqm

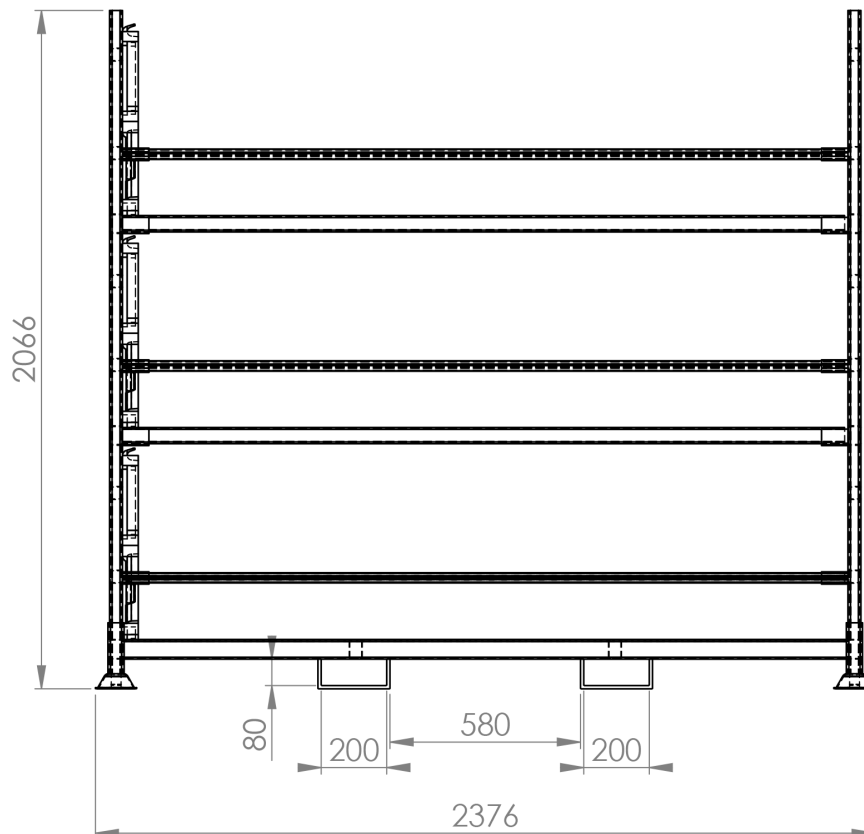

- Number in one row: 45 pcs
- Number in one level: 90 pcs

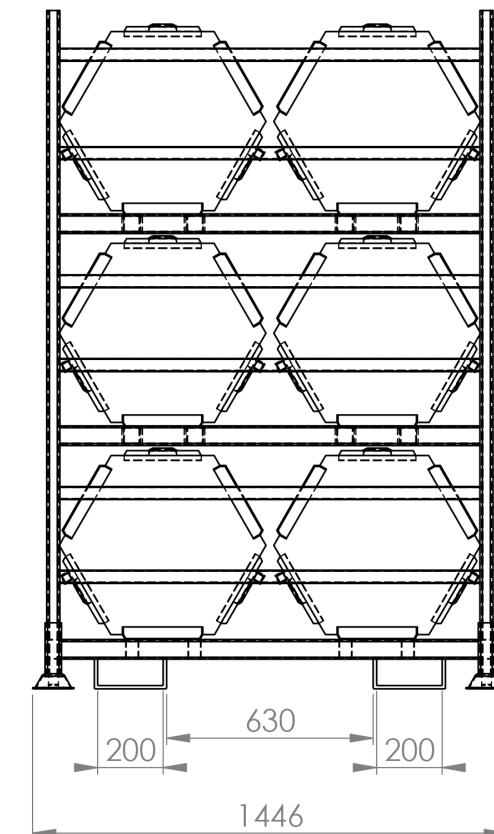

- Number in 3 levels: 270 pcs
- Number of sqm 3 levels: 72,9 sqm

FLEXIBLE SOLID flooring system is a strong, flexible and easy mounted ground protecting interlocking floor with high sustainability.

FLEXIBLE SOLID comes in two different models: Basic and Superior. The hexagonal design provides exceptionally strong locking in six directions.

FLEXIBLE SOLID is made from strong plastic (Polyolifins), developed for the UN for emergency and conflict areas. Its flexibility and strength makes these ground protecting floor tiles perfect for store units, pavilions and even to build temporary roads where heavy vehicle can operate. Even when it comes to events, camping and as a protecting surface, FLEXIBLE SOLID flooring system is optimal to use.

ADVANTAGES:

- Heavy duty floor.
- Can be applied on all types of outdoor surfaces, even sand, soil, grass and ice.
- Adapts to the subground and no preliminary work is needed.
- Can resist very heavy loads and carries trucks, machines and cars.
- Easy to install and move.
- Time of installation/person: approx. 100 m²/h

USAGE AREAS:

- Warehouses and tents.
- Outdoor events and concert venues.
- Temporary parking lots, e.g. in connection with events.
- Temporary roads that also allows heavy vehicles (e.g. building/construction works).
- As subfloor for sport arenas.
- Protection of existing surfaces.
- Events on ice.





STRONG, FLEXIBLE
AND EASY MOUNTED!



TIME OF INSTALLATION/PERSON
APPROX. 100 m²/h






GROUND PROTECTING
INTERLOCKING FLOOR WITH
HIGH SUSTAINABILITY.

EASY TO INSTALL.



FLEXIBLE SOLID FLOORING SYSTEM ASSEMBLED ON DIFFERENT SURFACES

A geotextile underneath protects the tiles from dirt on soft grounds like grass, sand or soil.
A coverage can be placed on top of the floor for hygienic purposes, etc.

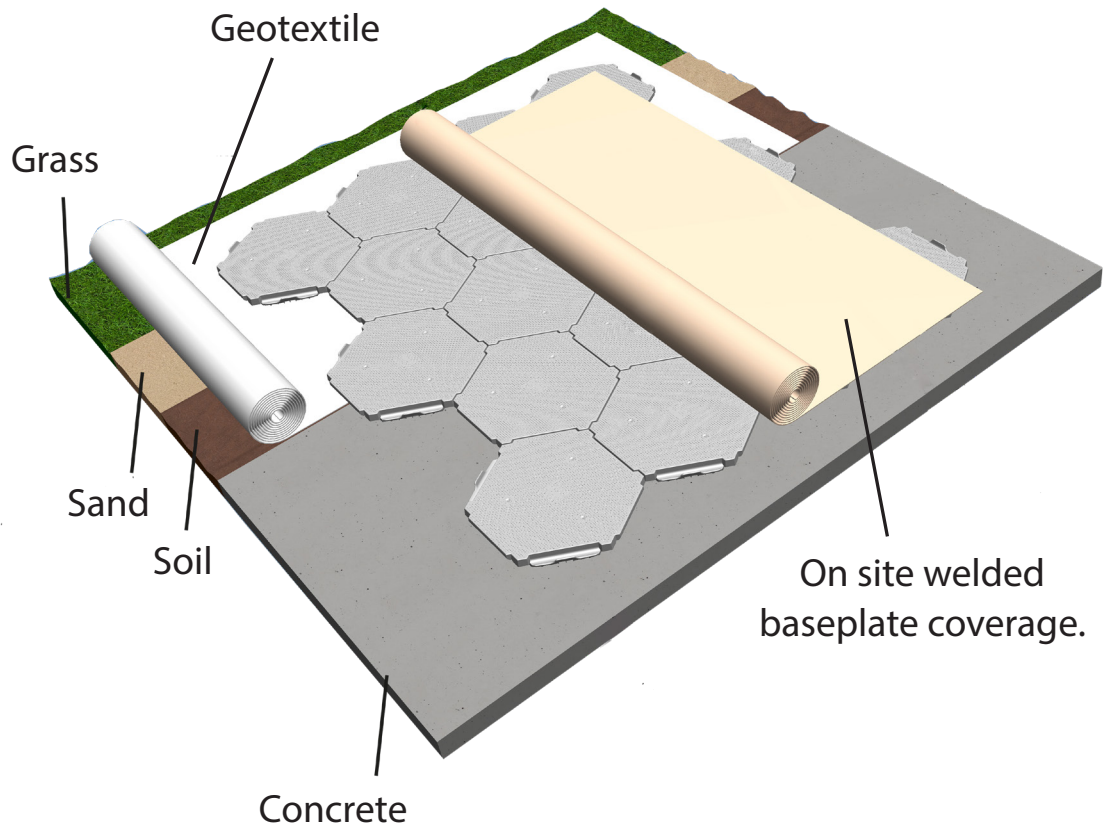

TECHNICAL INFORMATION



FLEXIBLE FLOOR Heavy Duty


- Material: Polyolifins
- Made in Sweden
- Point Load: 20000 Kg / m²
- Length: 630 mm
- Width: 575 mm
- Height: 50 mm
- Weight/tile: 3,1kg
- Weight/m²: ca 11,5 kg
- Colour: Black / grey. Request for optional colours.



FLEXIBLE FLOOR Light Duty

- Material: Polyolifins
- Made in Sweden
- Point Load: 5000 Kg / m²
- Length: 630 mm
- Width: 575 mm
- Height: 50 mm
- Weight/tile: 2.9 kg
- Weight/m²: ca 10,5 kg
- Colour: Black

SL DUTY AND XSL DUTY LAUNCHED IN DESEMBER




LOADING ON A PALLET

FLEXIBLE FLOOR Light Duty

- 84 pcs base tiles (22.68 m²)
- 1250 x 1135 x 1200 mm (Length x Width x Height)
- Weight pallet: 243 kg
- Double stack two pallets to a total height of 2400 mm

FLEXIBLE FLOOR Heavy Duty

- 84 pcs base tiles (22.68 m²)
- 1250 x 1135 x 1200 mm (Length x Width x Height)
- Weight pallet: 260 kg
- Double stack two pallets to a total height of 2400 mm




LOADING 20FT CONTAINER

FLEXIBLE FLOOR Light Duty

- 1280 pcs base tiles (345,6 m²)
- Weight container: 1280 pcs x 2,9 kg = 3712 kg + pallets

FLEXIBLE FLOOR Heavy Duty

- 1280 pcs base tiles (345,6 m²)
- Weight container: 1280 pcs x 3,1 kg = 3968 kg + pallets
- 1 Pallet: 115 cm high (20 tiles high) = 80 pcs/pallet = 21,6 m².
- Totally 16 pallets stacked á 21,6 m² = 1280 pcs = 345,6 m².



LOADING 40FT HIGH CUBE CONTAINER

Totally 36 pallets stacked.

FLEXIBLE FLOOR Light Duty

- 3024 pcs base tiles (816,48 m²)
- Weight container: 3024 pcs x 2,9 kg = 8770 kg

FLEXIBLE FLOOR Heavy Duty

- 3024 pcs base tiles (816,48 m²)
- Weight container: 3024 pcs x 3,1 kg = 9375 kg



www.ip-group.se

IPG Intelligent Packaging Group AB

Västrevångleden 2

302 41 Halmstad, SWEDEN

Tel: +46 35 102480

info@ip-group.com

